


Order No.:

CM-E3JK-DN11
CM-E3JK-DN13

Features

- High resistance to interference
- EMC protection level
- Good quality, high reliability


Wiring



Accessory

Screws and nuts*4, screwdriver*1, mounting bracket*1

Overall dimension

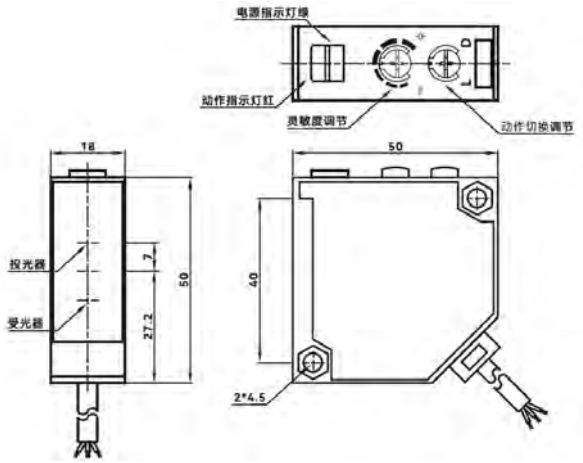

Technical Parameters

General description	
Switch point function	NPN/PNP, NO/NC universal
Method of detection	Diffuse reflection type
Rated operating distance Sn	DN11: 2.5m, N12: 30cm
Standard detector	300*300 white board
Rated grade	
Rated voltage	DC10 ~ 30V±10%
Response time	<1ms
Consumption of current	< 30mA
Working current	< 100mA
Circuit protection	Power polarity reverse connection protection, output short circuit prot-
	-ection,function to prevent mutual interference
Switch status indication	Power stability indicator light: Green; action indication: red
Deviation	Less than 20% of the detection distance
Light Source (Luminescence Wavelength)	Red light-emitting diode (624nm)
Sensitivity adjustment	Single-direction knob
Surrounding environment	
Ambient temperature	-25℃~+55℃(No freezing)
Ambient humidity	35~+95%RH(No condensation)
Environmental illumination	Sunlight: 10000Lx, incandescent lamp: 3000Lx
Mechanical properties	
Wiring	2m standard cable
Shell material	PBT
Camera lens	Optical PMMA
Protection level	IP65
Withstand Voltage	AC 500V , 50/60Hz 1 minute between the whole charging part and the shell
Insulation resistance	≥20 MΩ (DC 500 V with a megohmmeter) between the whole charging part and the shell
Vibration resistance	10～55 Hz, complex amplitude 1.5mm, 2H in X, Y and Z directions
Certification and standards	
Certification of products	CE CCC CQC ISO9001 ISO14001 ISO45001
Unit weight	About 152g

Copyright Cheemi Tech