


CE CQC ISO9001

Order No.:

CM18-BG10NC
CM18-BG10PC

Overall dimension

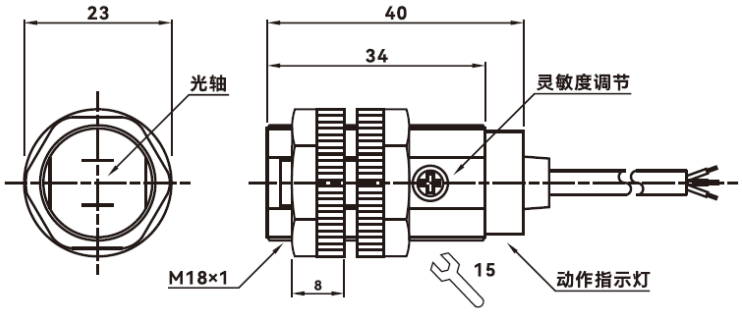


Features


- High light immunity
- High EMC protection level
- Good quality and high reliability
- Background suppression function

Wiring

NPN



PNP



Accessory

Screws*2, Screwdriver*1, Mounting bracket*1

Technical Parameters

General description	
Switch point function	NPN ; PNP
Method of detection	BGS
Rated action distance Sn	10 cm (white to other colors ratio: 10:9), 10cm without background suppression
Standard detector	White paper 100x100mm
Rated grade	
Rated voltage UB	DC12-24V
Voltage drop Ud	< 2V
Working current IL	<100mA
Response time	<1ms
Circuit protection	Reverse polarity protection、Short-circuit protection
Switching state indication	Power stable indicator: green; operation indicator: orange.
Surrounding environment	
Ambient temperature	-25...+55℃ (No icing, no condensation)
Ambient humidity	35~95% RH (no condensation)
Ambient lighting	Sunlight: 10,000Lx Incandescent lamp: 3,000Lx
Mechanical properties	
Wiring	2m standard cable
Shell material	ABS
Sensing surface	Optical PMMA
Protection level	IP65
Withstand Voltage	500V AC, 50/60Hz 1 minute between the whole charging part and the shell
Insulation resistance	≥20 MΩ (DC 500 V with a megohmmeter) between the whole charging part and the shell.
Vibration resistance	10～55 Hz, complex amplitude 1.5mm, 2H in X, Y and Z directions
Certification and standards	
Certificates	CE CCC CQC ISO9001 ISO14001 ISO45001
Unit weight	About 60g

The datasheet is subject to change without notice. Copyright Cheemi Tech