


Order No.:

CJUB8-10Q-NA
CJUB8-10Q-NB
CJUB8-10Q-PA
CJUB8-10Q-PB
CJUB8-10Q-DA
CJUB8-10Q-DB

Features

- Complete specifications, with short circuit protection and reverse connection protection
- Dedicated IC, stable detection distance, rich product specifications
- Use fold-resistant, oil-resistant wire


Wiring

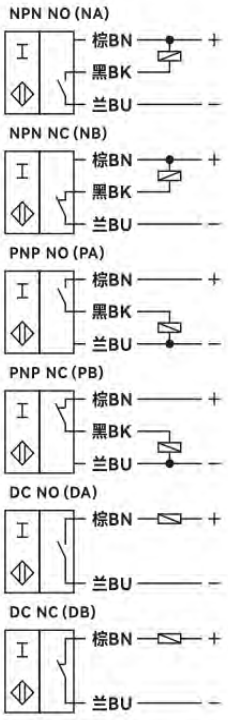

Accessory

Screw*2sets

Overall dimension

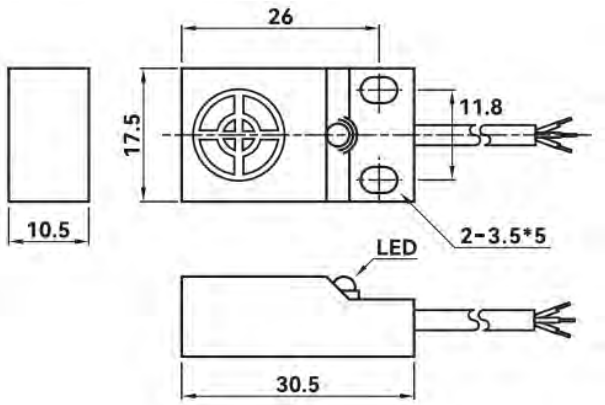

Technical Parameters

General description	
Switch point function	NPN NO、NPN NC、PNP NO、PNP NC、D
Rated operating distance Sn	8mm
Installation	Non-flush mounting
Standard detector	36*36*1t(Q253A)
Reliable operating distance Sa	0...6.4mm
Rated grade	
Rated voltage U_B	10...30VDC
Switching frequency f	0.3KHz
Hysteresis range	1-15% of detection distance
Repeatability	<3% of detection distance
No load current Io	<12mA
Leakage current Ir	0...100uA
Voltage drop Ud	NPN/PNP:<2.0V，DC<3.0V
Working current IL	NPN/PNP<200mA;DC<100mA
Circuit protection	Reverse polarity protection, short-circuit protection, surge absorption
Switch status indication	Red LED indicator
Surrounding environment	
Ambient temperature	-25℃...70℃ (No icing, no condensation)
Temperature effect	-Within 25 ℃... 70 ℃, within 10% of detection distance at+24 ℃
Ambient humidity	35...95%RH no condensation
Influence of voltage	<3%
Mechanical properties	
Wiring	Standard wire 2m
Shell material	PBT
Sensing surface	PBT
Protection level	IP67
Withstand voltage	500V AC, 50/60Hz 1 minute between the whole charging part and the shell
Insulation resistance	≥20 MΩ (DC 500 V with a megohmmeter) between the whole charging part and the shell.
Vibration resistance	10～55 Hz, complex amplitude 1.5mm, 2H in X, Y and Z directions
Certification and standards	
Certificates	CE CCC CQC ISO9001 ISO14001;ISO45001
Weight	55g

The datasheet is subject to change without notice. Copyright Cheemi Tech