



DATA SHEET

High Accuracy Current Sensor

P/N: CHB200TQ15D100

I_{PN}=200A

Feature

- It is a current sensor, based on the principle of fluxgate principle.
- Electrostatic shield between primary and secondary circuit
- It provides accurate electronic measurement of DC, AC or pulsed voltage.
- Supply voltage: $\pm 11 \sim \pm 16$ V

Advantages

- High accuracy
- Wide frequency bandwidth
- Low temperature drift
- Very good linearity
- Optimized response time

Applications

- Metrological verification and calibration
- Laboratory current measurement
- Instrumentation (e.g. power analyzer)
- Medical equipment (e.g. MRI)
- Battery pack detection
- Power control



RoHS



Electrical data: ($T_A = 25^\circ\text{C} \pm 5^\circ\text{C}$)

Type	CHB200TQ15D100		
Parameters			
Rated Input $I_{PN}(A)$	± 200		
Measuring Range $I_{PM}(A)$ 1Min/Hour	± 240		
Current consumption $I_C (mA)$ I_{PM} Range	Minimum	Standard	Maximum
	± 20	± 220	± 140
Power Supply V_C	± 11	--	± 16
Current change Input:Output K_N	2000: 1		
Rated Output Current(I_{SN})mA	--	100	--



Cheemi Technology Co., Ltd

Tel: 025-85560520 E-mail: info@cheemi-tech.com www.cheemi-tech.com
Add: 3/F, Building 6, Jingang Science and Technology Innovation Park,
No.1 Kechuang Road, Qixia District, Nanjing City, Jiangsu Province, China.

Cheemi Technology Co., Ltd

Measuring Resistance(Ω) R_M	0	20	30
Accuracy Xe (A) @0%~50% I_{PN}	--	--	0.01
Accuracy Xe (V) RD% @50% I_{PN} ~ I_{PM}	--	--	0.01
Ratio error X_{Ge} (A) @0%~50% I_{PN}	--	--	0.01
Ratio error X_{Ge} RD% @50% I_{PN} ~ I_{PM}	--	--	0.01
Angle error X_{Pe} crad	--	--	0.01
Linearity ε_L (ppm)	--	--	50
Temperature drift coefficient TCI ppm/K	--	--	2
Time drift coefficient TT ppm/month	--	--	2
Power supply anti interference TV ppm/V	--	--	5
Zero offset current I_O (mA) $25 \pm 10^\circ C$	--	--	± 0.005
Zero offset current I_{OT} (mA) Within the full operating temperature range	--	--	± 0.010
Ripple current I_n DC-10Hz (ppm)	--	--	2
Dynamic response time $t_r(us)$ $di/dt=100A/us$ rise to 90% I_{PN}	--	--	1
Bandwidth(-3dB) F (kHz)	0	--	100

Insulation Coordination:

Item	Symbol	Test condition	Value	Unit
RMS voltage for AC insulation test	V_d	50Hz/1Min between primary and secondary	2.5	KV
Impulse withstand voltage	V_w	50us between primary and secondary	5	KV

General data:

Parameter	Value
Operating temperature $T_A(^{\circ}C)$	-40 ~ +85
Storage temperature $T_S(^{\circ}C)$	-45~ +85
Mass $M(g)$	40g $\pm$ 5g




2

Cheemi Technology Co., Ltd
Tel: 025-85560520 E-mail: info@cheemi-tech.com www.cheemi-tech.com
Add:3/F, Building 6, Jingang Science and Technology Innovation Park,
No.1 Kechuang Road, Qixia District, Nanjing City, Jiangsu Province, China.

Standards	IEC60950-1:2001
	EN50155:2007; EN50121:2006
	SJ20790-2000
	UL94-V0
	EN60947-1:2004

Dimensions(mm):

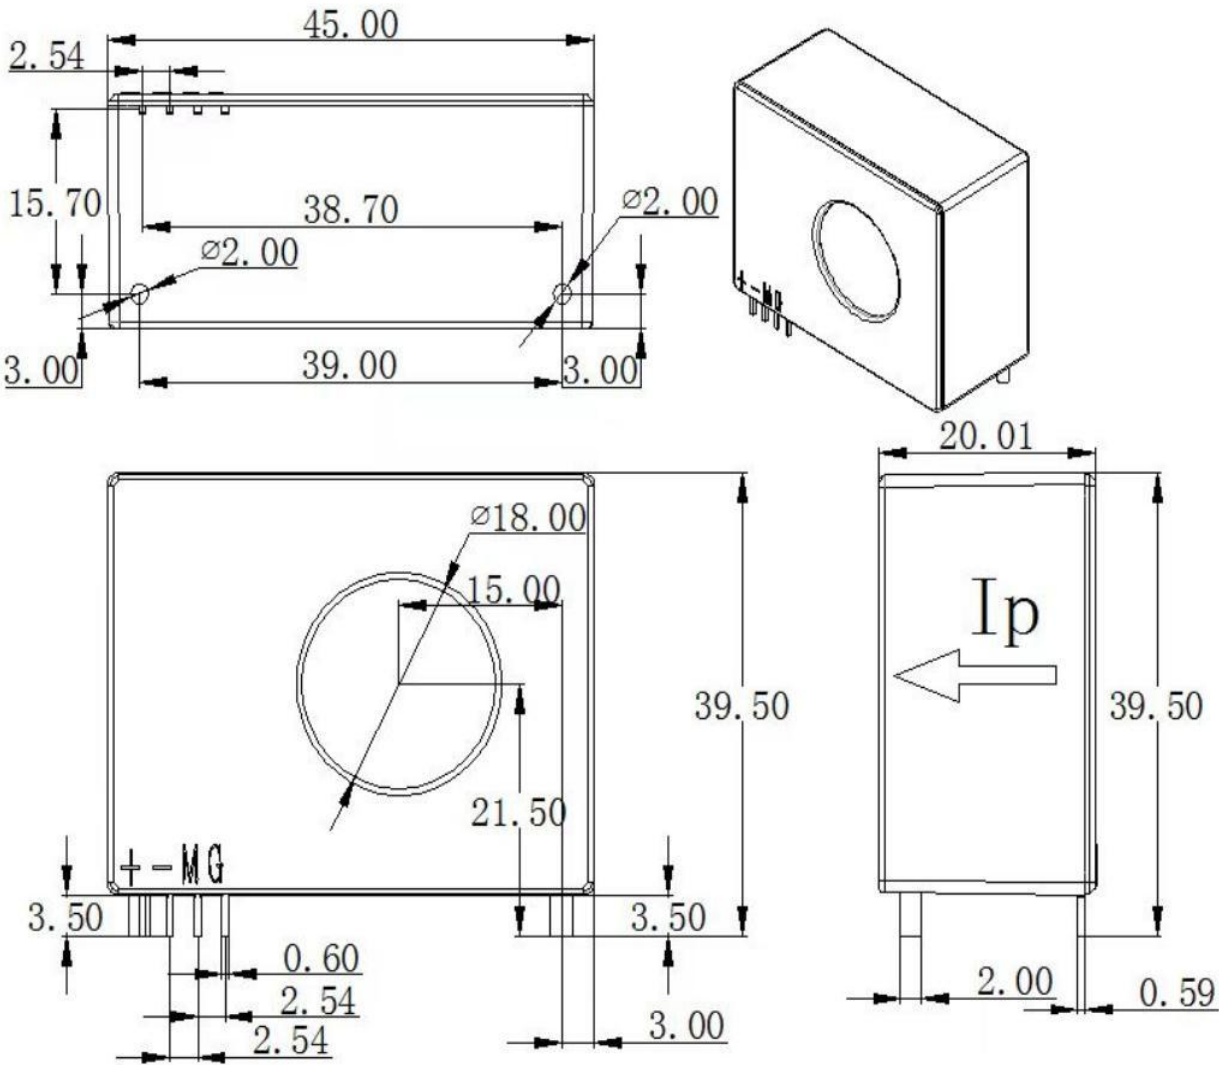

Remarks:
1. All dimensions are in mm.
2. General tolerance $\pm 0.7\text{mm}$.
Connector: 2510-4P



Cheemi Technology Co., Ltd
Tel: 025-85560520 E-mail: info@cheemi-tech.com www.cheemi-tech.com
Add: 3/F, Building 6, Jingang Science and Technology Innovation Park,
No.1 Kechuang Road, Qixia District, Nanjing City, Jiangsu Province, China.

Remarks:

- Before using the product, please make sure to carefully read the user manual. When moving the product, please make sure to turn off the power first and unplug all the connecting cables that are connected to it. If any damage is found to the casing, firmware, power cord, connecting cable, or connected equipment, please immediately disconnect the device from the power supply. and If there are any concerns about the safe operation of the equipment, please immediately shut down the equipment and its related accessories, and contact our company's technical support department as soon as possible to communicate and resolve the issue.
- When the direction of the input current IP is consistent with the direction indicated by the arrow in the outline drawing, the output current IS is in the forward direction.
- Please try to locate the primary conductor at the center of the probe aperture as much as possible.
- The through-hole is made of metal material, so the through-hole wire cannot be an exposed cable. The through-hole wire must be insulated.
- This module is a standard sensor, please contact us for special applications.
- We reserve the right to modify this sensor manual without prior notice.

WARNING : Incorrect wiring may cause damage to the sensor.



Cheemi Technology Co., Ltd
Tel: 025-85560520 E-mail: info@cheemi-tech.com www.cheemi-tech.com
Add: 3/F, Building 6, Jingang Science and Technology Innovation Park,
No.1 Kechuang Road, Qixia District, Nanjing City, Jiangsu Province, China.