



Inductive Proximity Sensor/Switch Datasheet

CF-E3S-GS30C1 Slot Type Color Identity Photoelectric Switch Sensor

Introduction

- Photoelectric sensor is a piece of equipment used to discover the distance, absence, or presence of an object by using a light transmitter, often infrared, and a photoelectric receiver. There are three different useful types: through beam, diffused and retro-reflective.
- Through-beam type photoelectric switch is designed that via the light beam between opposite-mounted transmitter and receiver, the object passing through these two devices will interrupt the light beam and start the receiver. The detection range of this type is up to 50M from 5M.
- Diffuse reflection type photoelectric switch integrates the transmitter and the receiver. Light reflected by the photoelectric switch is reflected back to the receiver by the detected object. Normally the detection range of this type is from 10cm to 1M.
- Retro-reflective type photoelectric switch also integrates the transmitter and the receiver. Its difference from other models is that reflector is used to reflect light to the photoelectric switch. The detection range of this type is up to 2M.


Features:

- ◆ All-purpose type ,which can directly substitute the same type of P+F and OMRON
- ◆ Power supply reversal connection protection ;can directly connect with PLC
- ◆ For slot type ,there is no need to adjust the optical axis
- ◆ Long service life ,high reliability and strong resistance property to environment
- ◆ Red LED indicates that it's available to detect the sensor operating state
- ◆ Newly added metal housing to improve the installation intensity
- ◆ Countermeasure to improve the housing intensity and to solve disconnection
- ◆ IP67 protection structure (IEC specification)



Inductive Proximity Sensor/Switch Datasheet

Structure Parameter:

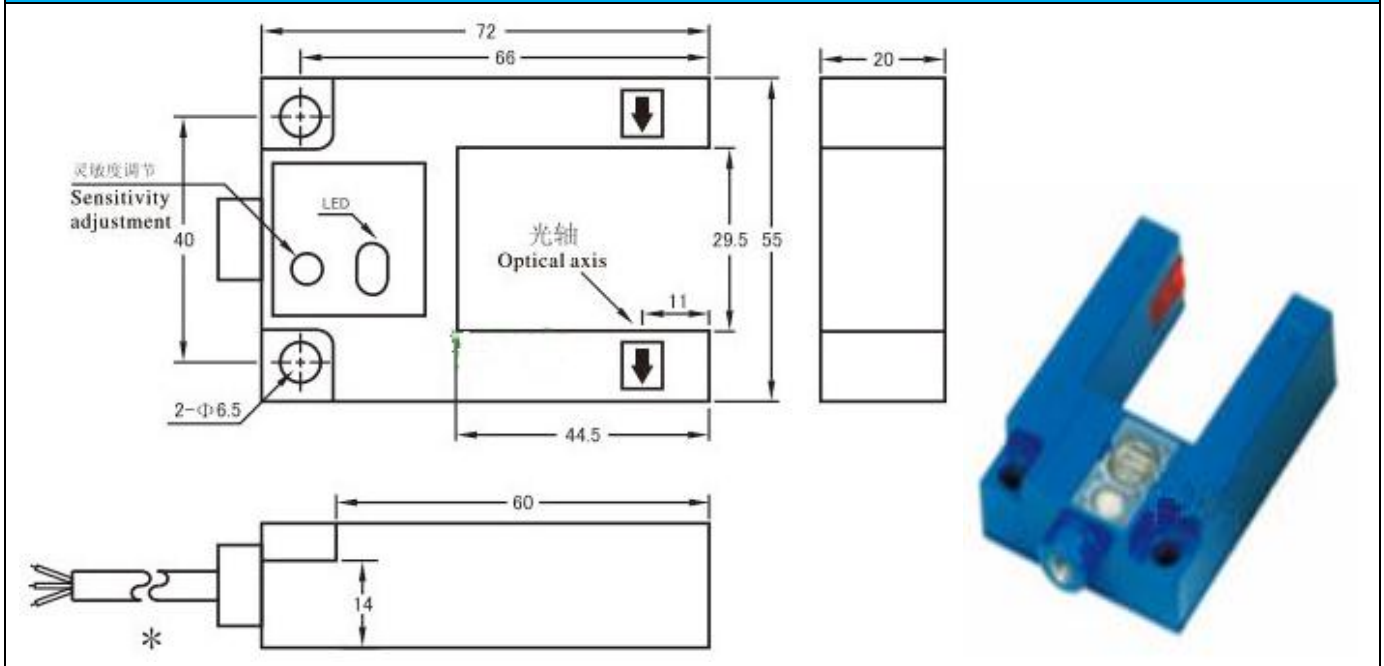

Technical Parameter:

Dimension			20×52×72	
Type	DC type	NPN	NO	CF-E3S-GS30C1
			NC	CF-E3S-GS30C2
		PNP	NO	CF-E3S-GS30B1
			NC	CF-E3S-GS30B2
Supply voltage			DC6-36V	
Detection method			Slot type	
Detection range			30mm	
Detection target			Opaque object	
Detection range regulation			Sensitivity adjuster	
Response frequency			300 Hz	
Working current			300mA below	
Insulation impedance			50 MΩ	
environment temperature			-20℃~70℃(248-343K)	
Connection form			2m, PVC	
Protection grade			IP65	